

intersecor Under Mirror Light



~ U.S. Patent #D636,113 (on light only)~
Other Patents Pending

Under Mirror Light Kit

Standard Configuration #ENT2B3(x)
Xylex Lens #ENT2B3(x)-EU

Light includes in-line flasher, three wedges (0°, 5° and 10°)
and foam gasket.

Replace (x) in Order Number for Color Selection

Solid Colors =




Light only works on flat surfaces

Features

- The first light of its kind to offer critical intersection warning and side warning
- Design of light is based upon problem solving research - 30% of all emergency vehicle crashes are likely to occur at dangerous intersections
- No other light offers 180 degree output - specially designed reflector amplifies and throws the light at the perfect angle to increase visibility at intersections and offer side warning illumination
- Unique under mirror mount simplifies installation - labor saving light is much easier to install than traditional front mirror skull mounts - no mirrors to work behind or around
- Light can be surface mounted to any flat area on any type of vehicle - elevate your safety and visibility by mounting to the heachache rack or body of the vehicle wherever additional lighting is needed
- Features cruise mode for steady burn if desired



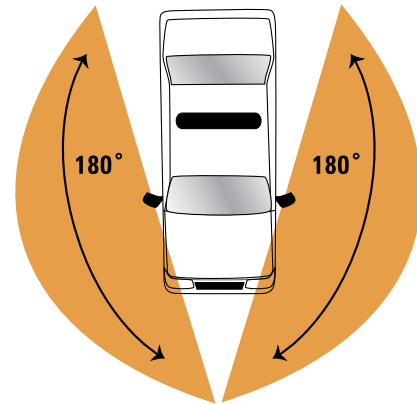

accessories

Curved Surface Adaptors (sold in pairs)

Curved Surface Adaptors, Universal

2011+ Curved Surface Adaptor, Chevy Caprice

2011+ Curved Surface Adaptor, Dodge Charger

2013+ Curved Surface Adaptor, Ford Sedan

2013+ Curved Surface Adaptor, Ford Explorer PI

2013+ Curved Surface Adaptor, Dodge Durango

Special Service Vehicle

#PNT1CRV01

#PNT1CRV02

#PNT1CRV03

#PNT1CRV04

#PNT1CRV05

#PNT1CRV06



Installation Bracket (optional)

(includes brackets and screws)

#PNT1WRRT



All accessories do not include light

For other Intersector products, refer to the Surface Mount on page 33.

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	30 flash patterns
INPUT VOLTAGE	10-16 Vdc
CURRENT DRAW	Less than 1.5 Amps
LIGHT SYNC	Yes
LED COUNT	3 LEDs
OPERATING TEMPERATURE	-40° C to +65° C / -40° F to +149° F
DIMENSIONS	2.9" (7.4 cm) W x 1.9" (4.8 cm) H x 2.9" (7.4 cm) D
MOUNTING	Under Mirror or Surface mount
CERTIFICATIONS	SAE J845 Class 1 certified and ECE Reg. 10
WARRANTY	Five-year